

WALL

Insulating panel with heat-welded sheets.
Stock colors are anthracite gray, black, white
aluminum, pure white and signal white


LUX

Insulating panel with (pre-)anodized sheets from stock,
10-20my. Other possible shades are natural and
Metallica anodizing shades

CUSTOM

Customized insulating panel with aluminum sheets.
Available in RAL, NCS, IGP and a choice of
countertypes

Aluminum sheet thickness: 1.5 or 2 mm
Max. Dim. 2000 x 4000 mm

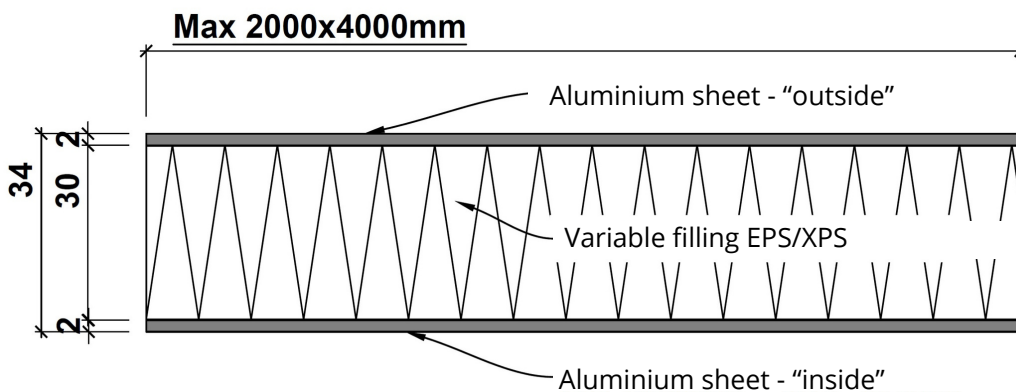

SANDWICH PANELS

DOOR INFILL
FIXED ELEMENTS
CROSS-POSTS
BALCONY PARTITIONS



METAPANEL INSULATION PANELS

**CUSTOM
BLANKS**

HIGH INSULATION

**UNLIMITED
DESIGNS**



METAPANEL

TECHNICAL DATA

EXAMPLE U VALUES

Aluminium Thickness: 2 mm, Rsi 0.13 m²K/W, Rse 0.04 m²K/W

FILLING (TYPE) THICKNESS	TOTAL THICKNESS	U-VALUE	
EPS, 20 mm	24 mm	1.49	W/M ² K
EPS, 30 mm	34 mm	1.09	W/M ² K
EPS, 40 mm	44 mm	0.85	W/M ² K
EPS, 50 mm	54 mm	0.70	W/M ² K
EPS, 60 mm	64 mm	0.60	W/M ² K
XPS, 10 mm	14 mm	2.19	W/M ² K
XPS, 20 mm	24 mm	1.35	W/M ² K
XPS, 30 mm	34 mm	0.97	W/M ² K
XPS, 40 mm	44 mm	0.76	W/M ² K
XPS, 50 mm	54 mm	0.63	W/M ² K
XPS, 60 mm	64 mm	0.53	W/M ² K



← Visit our website